

Integrated measuring systems
for the whole water cycle




Measurement accessories
Clamp-on probes



HYDREKA
www.hydreka.fr

Features and advantages

- The pump running time measurement and recording chain consists of:
 - One or more current detectors.
 - A standalone Octopus recorder.
- The probe can be fitted without shutting down the installations to be monitored. The assembly is capable of recording the operation of several pumps in parallel simultaneously.
1 automatic sampler can be servo-controlled by the operation of a pump, via the Octopus.
- The Winfluid software programs the standalone recorders and handles multi-pump system volumes and flow rates.

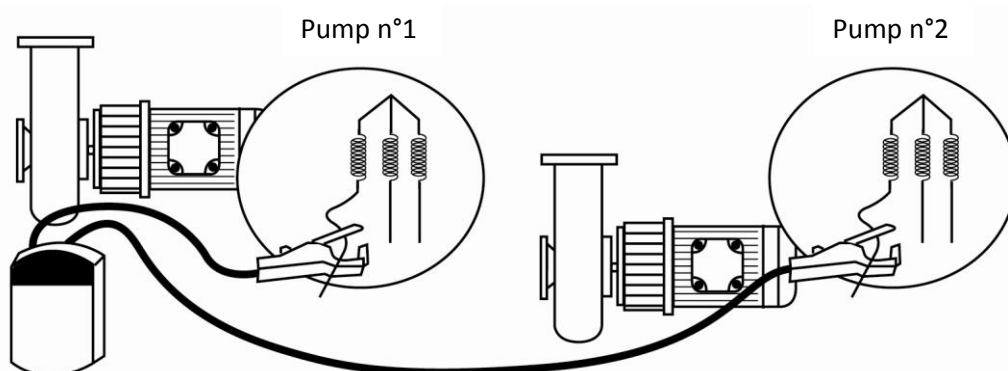

Technical Specifications

Current detector	
Current detector	1.5 - 200 Aac
Detection threshold	0.5 Aac
Output	N.O 1A @ 30V AC/DC
	Self-powered by magnetic field
Passage diameter	18 mm
Operating temperature	-15 to + 60°C
Dimension	74 x 65 x 26 mm

Product available for sale and rental. Please contact us for more information.

HYDREKA
www.hydreka.fr

34, route de Saint Romain - 69450 St Cyr au Mont Or – France
Tél. +33 (0)4 72 53 11 53 - Fax +33 (0)4 78 83 44 37 - e-mail : hydreka@hydreka.fr

A HALMA COMPANY

May 2011